

# Features

## Regulated Converter

- Wide range input: 85-264VAC
- 130W peak power
- OVC III rating
- 2MOPP medical certified, B and BF ready
- 4000m operating altitude
- Class B EMC filter built-in

**RECOM**  
AC/DC Converter

## RACM130E-K

**130 Watt  
Open Frame  
2"x4" or  
Enclosed**



### Description

The RACM130E-K AC/DC power supply series provides up to 130W output to drive dynamic loads and is certified to safety standards for the medical, ITE, industrial and household markets. With an industry-standard 2"x4" footprint, variants are available as an open card or with an enclosure. Input is wide-range for nominals from 100 to 240Vac, the output is tightly regulated and easy system integration is enabled by a wide compliance margin to EMC standard EN55032 class B. On-board dual fuses are included and the product includes immunity to surges for installation Class 3 and Over-Voltage Category OVCIII. Certifications are maintained to 4000m altitude and with a wide operating temperature range, the series is one of the most versatile on the market.



### Selection Guide

| Part Number                  | Input Voltage Range [VAC] | nom. Output Voltage [VDC] | Output Current <sup>(1)</sup> [A] | Output Power [W] | Efficiency typ. <sup>(2)</sup> [%] |
|------------------------------|---------------------------|---------------------------|-----------------------------------|------------------|------------------------------------|
| RACM130E-12SK <sup>(2)</sup> | 85-264                    | 12                        | 10.8                              | 130              | 86                                 |
| RACM130E-15SK <sup>(2)</sup> | 85-264                    | 15                        | 8.66                              | 130              | 88                                 |
| RACM130E-24SK <sup>(2)</sup> | 85-264                    | 24                        | 5.42                              | 130              | 88                                 |
| RACM130E-36SK <sup>(2)</sup> | 85-264                    | 36                        | 3.61                              | 130              | 88                                 |
| RACM130E-48SK <sup>(2)</sup> | 85-264                    | 48                        | 2.71                              | 130              | 88                                 |

#### Notes:

Note1: Refer to "Thermal Derating for externally provided forced air"

Note2: Efficiency is tested at nominal input and full load at +25°C ambient

### Model Numbering



#### Notes:

Note3: "/OF" = standard open frame version

"/ENC" = standard enclosed version

#### Ordering Examples:

|                   |        |        |            |             |
|-------------------|--------|--------|------------|-------------|
| RACM130E-12SK/OF  | 12Vout | Single | open frame | 2" x 4"     |
| RACM130E-15SK/ENC | 15Vout | Single | enclosed   | 2.4" x 4.6" |



ANSI/AAMI ES60601-1 Ed. 3.1 certified  
CSA/CAN-C22.2 No. 60601-1:14 certified  
IEC/EN60601-1 certified  
IEC62368-1 certified  
IEC/EN60335-1 certified  
IEC/EN61558-2-16 certified  
IEC/EN61558-1 certified  
EN55032 compliant  
EN55035 compliant

**Specifications** (measured @ Ta= 25°C, nom. Vin, 130W @1m/s airflow and after warm-up unless otherwise stated)

### BASIC CHARACTERISTICS

| Parameter                                               | Condition                |                        | Min.   | Typ.  | Max.       |
|---------------------------------------------------------|--------------------------|------------------------|--------|-------|------------|
| Nom. Input Voltage                                      | 50/60Hz                  |                        | 100VAC |       | 240VAC     |
| Operating Range <sup>(4,5)</sup>                        | 47-63Hz                  |                        | 85VAC  |       | 264VAC     |
|                                                         | DC                       |                        | 120VDC |       | 370VDC     |
| Input Current                                           | 115VAC                   |                        |        |       | 2.5A       |
|                                                         | 230VAC                   |                        |        |       | 1.5A       |
| Inrush Current                                          | cold start               | 115VAC                 |        |       | 30A        |
|                                                         |                          | 230VAC                 |        |       | 60A        |
| No load Power Consumption                               | @230VAC                  |                        |        | 200mW |            |
| ErP Standby Mode Conformity<br>(Output Load Capability) | 115/230VAC               | P <sub>IN</sub> = 0.5W |        | 0.2W  |            |
|                                                         |                          | P <sub>IN</sub> = 1W   |        | 0.6W  |            |
| Input Frequency Range                                   | AC Input                 |                        | 47Hz   |       | 63Hz       |
| Minimum Load                                            |                          |                        | 0%     |       |            |
| Power Factor                                            | 115VAC                   |                        |        | 0.5   |            |
|                                                         | 230VAC                   |                        |        | 0.4   |            |
| Start-up Time                                           |                          |                        |        | 200ms |            |
| Rise Time                                               |                          |                        |        | 20ms  |            |
| Hold-up Time                                            | 115VAC                   |                        |        | 16ms  |            |
|                                                         | 230VAC                   |                        |        | 70ms  |            |
| Internal Operating Frequency                            | 100% load at nominal Vin |                        |        | 65kHz |            |
| Output Ripple and Noise <sup>(6)</sup>                  | 20MHz BW                 |                        |        |       | 1% of Vout |



#### Notes:

Note4: The products were submitted for safety files at AC-Input operation

Note5: Refer to “Line Rating” & “PEAK LOAD CAPABILITY”

Note6: Measurements are made with a 0.1µF MLCC & 10µF E-cap in parallel across output. (low ESR)

### Efficiency vs. Load

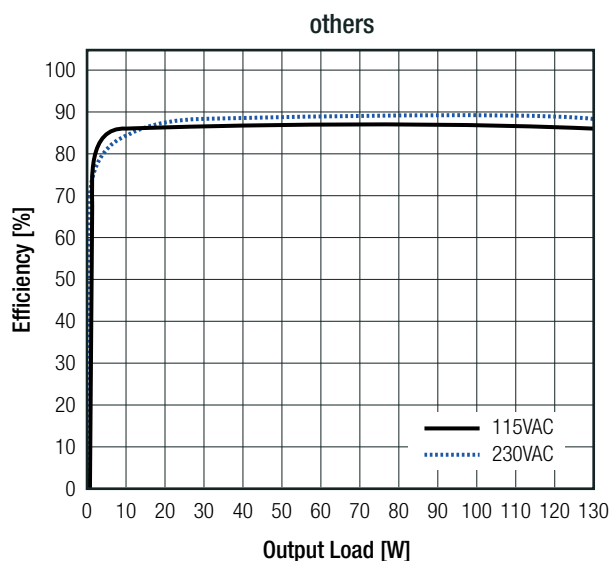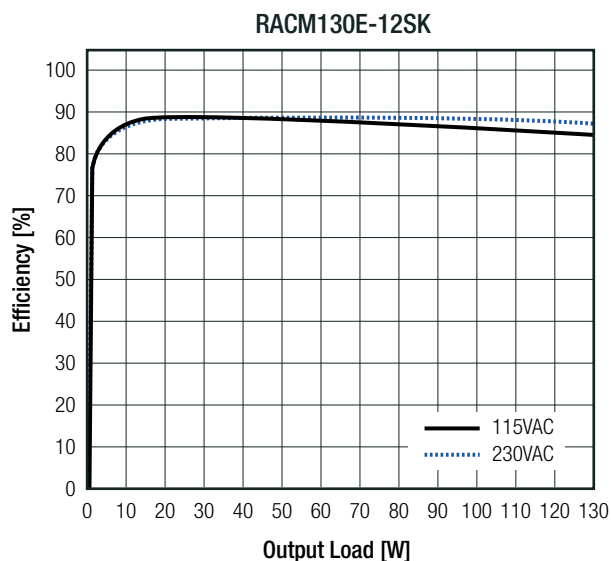

**Specifications** (measured @ Ta= 25°C, nom. Vin, 130W @1m/s airflow and after warm-up unless otherwise stated)



### REGULATIONS

| Parameter                      | Condition                        | Value      |
|--------------------------------|----------------------------------|------------|
| Output Accuracy                |                                  | ±2.0% typ. |
| Line Regulation                | low line to high line, full load | ±0.5% typ. |
| Load Regulation <sup>(7)</sup> | 10% to 100% load                 | 1.0% typ.  |
| Transient Response             | 25% load step change             | 4.0% max.  |
|                                | recovery time                    | 500µs max. |

**Notes:**

#### Deviation vs. Load

(@ 115-230VAC)

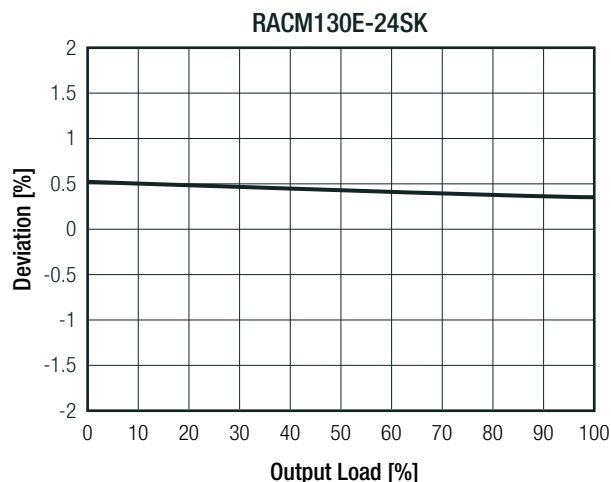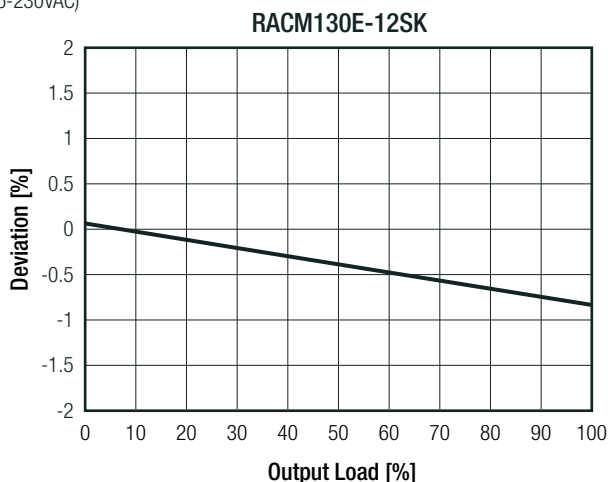

### PROTECTIONS

| Parameter                        | Type                                  |          | Value                      |
|----------------------------------|---------------------------------------|----------|----------------------------|
| Internal Input Fuse              | L and N (dual fusing)                 |          | T4A, slow blow type        |
| Short Circuit Protection (SCP)   |                                       |          | hiccup, auto recovery      |
| Over Voltage Protection (OVP)    |                                       |          | 120% - 180%, auto recovery |
| Over Voltage Category            | according to 61558-2-16               |          | OVCIII (up to 2000m)       |
|                                  | according to 60601-1                  |          | OVCII                      |
| Over Current Protection (OCP)    |                                       |          | 110% - 180%, auto recovery |
| Isolation Voltage <sup>(8)</sup> | I/P to O/P                            | 1 minute | 4kVAC                      |
| Isolation Resistance             | I/P to O/P, V <sub>iso</sub> = 500VDC |          | 1GΩ min.                   |
| Isolation Capacitance            | I/P to O/P, 100kHz/0.1V               |          | 100pF max.                 |
| Touch Current                    | 264VAC/63Hz                           | NC       | <100µA                     |
|                                  |                                       | SFC      | <500µA                     |
| Insulation Grade                 |                                       |          | reinforced                 |
| Means of Protection              | ≤300Vrms working voltage              |          | 2MOPP                      |

**Notes:**

Note8: For repeat Hi-Pot testing, reduce the time and/or the test voltage

**Specifications** (measured @  $T_a = 25^\circ\text{C}$ , nom.  $V_{in}$ , 130W @ 1m/s airflow and after warm-up unless otherwise stated)

### ENVIRONMENTAL


| Parameter                   | Condition                                        | Value                                                         |
|-----------------------------|--------------------------------------------------|---------------------------------------------------------------|
| Operating Temperature Range | with derating @ natural convection 0.1m/s        | $-40^\circ\text{C}$ to $+90^\circ\text{C}$                    |
| Temperature Coefficient     |                                                  | $\pm 0.05\%/K$                                                |
| Operating Altitude          | according to 60601-1                             | 4000m (OVCII)                                                 |
|                             | according to 61558-2-16                          | 2000m (OVCIII)                                                |
| Operating Humidity          | non-condensing                                   | 5% - 95% RH max.                                              |
| Pollution Degree            |                                                  | PD2                                                           |
| Vibration                   | according to MIL-STD-202G                        | 10-500Hz, 5G 10min./1cycle, period 60min.<br>along x,y,z axes |
| MTBF                        | according to MIL-HDBK-217F, G.B.                 | $T_{AMB} = +25^\circ\text{C}$                                 |
|                             |                                                  | $T_{AMB} = +40^\circ\text{C}$                                 |
| Design Lifetime             | 230VAC/50Hz and full load at $+25^\circ\text{C}$ | $> 30 \times 10^3$ hours                                      |

### Still air convection cooled ratings


#### RACM130E-K/OF

(@ natural convection 0.1m/s)

#### 100VAC

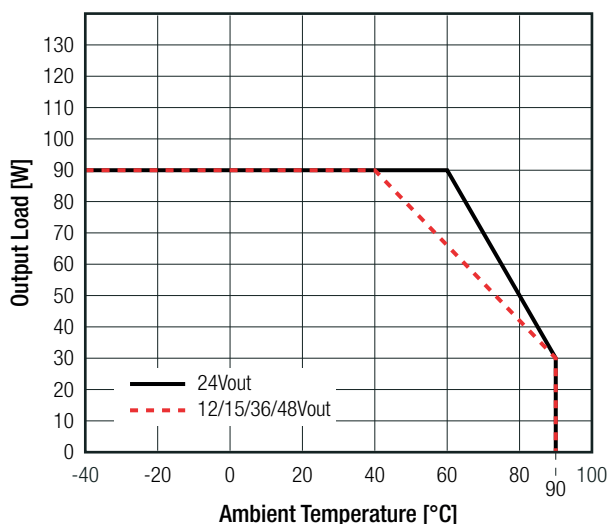


#### 120-240VAC

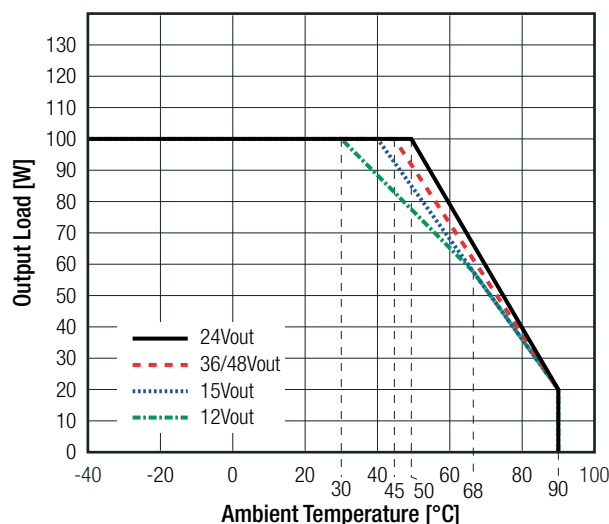


#### RACM130E-K/ENC

(@ natural convection 0.1m/s)

#### 100VAC

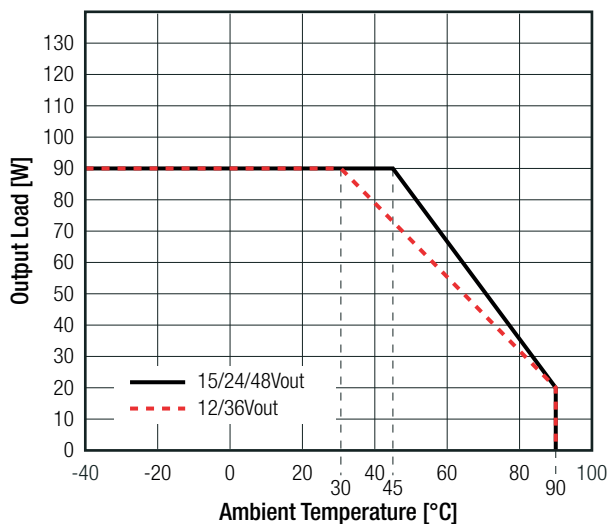

#### 120-240VAC

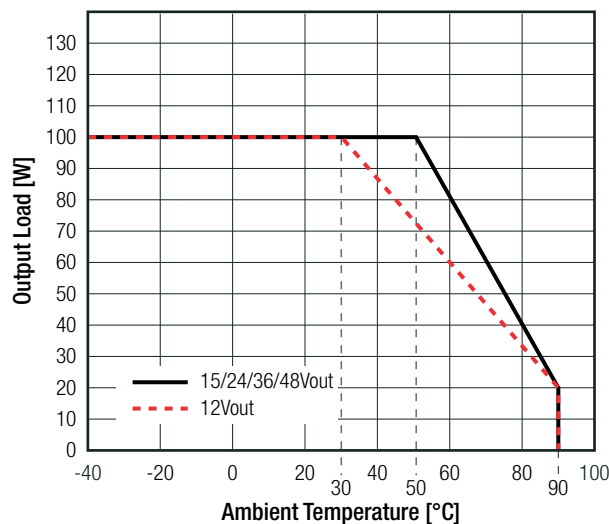


continued on next page

**Specifications** (measured @  $T_a = 25^\circ\text{C}$ , nom. Vin, 130W @1m/s airflow and after warm-up unless otherwise stated)

### Thermal Derating for externally provided forced air


#### Line Rating

(@ 1m/s airflow; valid for "/OF" and "/ENC" versions)

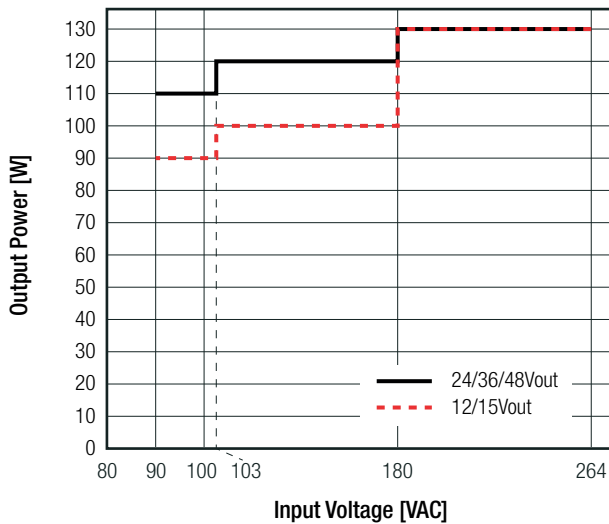


#### Thermal Derating

(valid for "/OF" and "/ENC" versions)

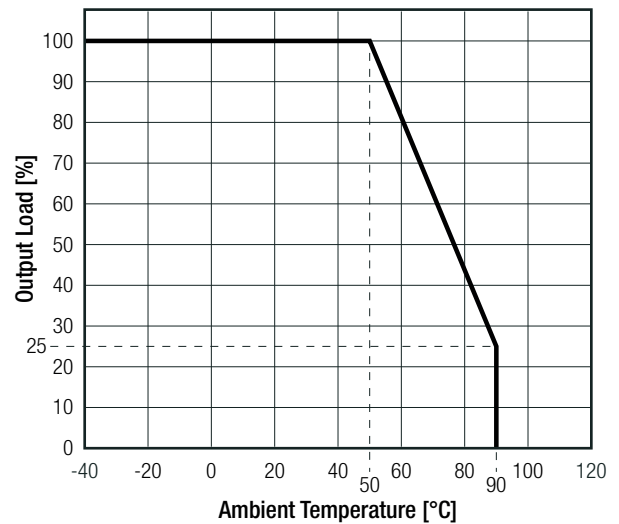

### PEAK LOAD CAPABILITY (@ 0.1 m/s natural convection; valid for "/OF" and "/ENC" versions)

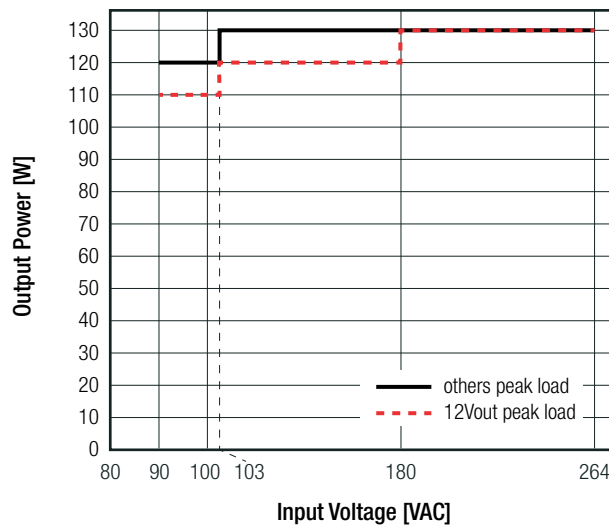

#### Calculation for recovery power:

$P_p$  = peak output power ( $\leq 130\text{W}$ ) [W]  
 $P_r$  = recovery output power [W]  
 $t_1$  = peak time set (10s max.) [s]  
 $t_2$  = recovery time (min.  $3 \times t_1$ ) [s]  
 $k$  = safety factor 1.2 []


$$P_r = \frac{100 \times (t_1 + t_2) - (P_p \times t_1)}{t_2 \times k}$$

#### Practical Example (RACM130E-24SK/OF):

Take the RACM130E-24SK/OF at 230VAC input Voltage and full load at  $T_{AMB} = 25^\circ\text{C}$ , with natural convection.

$P_p = 130\text{W}$   
 $t_1 = 10\text{s}$   
 $t_2 = 30\text{s}$   
 $k = 1.2$

$$P_r = \frac{100 \times (10 + 30) - (130 \times 10)}{30 \times 1.2} = 75\text{W}$$

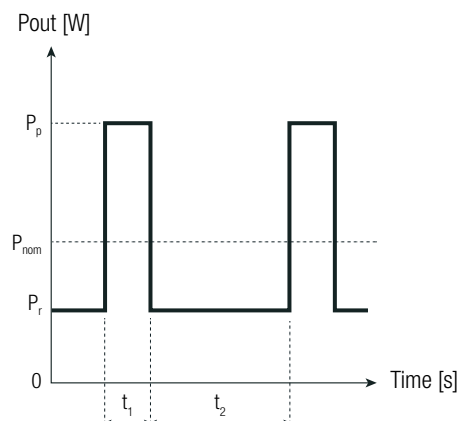

**Specifications** (measured @ Ta= 25°C, nom. Vin, 130W @1m/s airflow and after warm-up unless otherwise stated)


| SAFETY AND CERTIFICATIONS                                                                                                                              |                                                                       |                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Certificate Type (Safety)                                                                                                                              | Report Number                                                         | Standard                                                                                        |
| Medical electrical equipment Part 1: General requirements for basic safety and essential performance                                                   | E511305-D1002-1/A0/C0-UL                                              | CAN/CSA-C22.2 No. 60601-1:14, 3rd Edition<br>ANSI/AAMI ES60601-1:2005 + A2:2020                 |
| Medical electrical equipment Part 1: General requirements for basic safety and essential performance                                                   |                                                                       | IEC60601-1:2005 + AM1:2012 3rd Edition<br>EN60601-1:2006 + A12:2014                             |
| Audio/Video, information and communication technology equipment - Safety requirements (CB Scheme)                                                      | 085-220335301-000                                                     | IEC62368-1:2018 3rd Edition                                                                     |
| Household and similar electrical appliances – Safety – Part 1: General requirements (LVD)                                                              | 4393463.50                                                            | IEC60335-1:2010 + C1:2016 5th Edition<br>EN60335-1:2012 + A15:2021                              |
| Safety of power transformers, power supplies, reactors & similar products for supply voltages up to 1100 V Part 2: Particular requirements (CB Scheme) | 085-220335401-000                                                     | IEC61558-2-16:2009 + A1:2013 1st Edition                                                        |
| Safety of power transformers, power supplies, reactors & similar products for supply voltages up to 1100 V Part 2: Particular requirements             | 64.250.22.03354.01                                                    | EN61558-2-16:2009 + A1:2013                                                                     |
| Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V (CB Scheme)                               | 085-220335401-000                                                     | IEC61558-1:2017 3rd Edition                                                                     |
| Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V (CB Scheme)                               | 64.250.22.03354.01                                                    | EN IEC 61558-1:2019                                                                             |
| RoHS2                                                                                                                                                  |                                                                       | RoHS 2011/65/EU + AM2015/863                                                                    |
| EMC Compliance (EN61204-3)                                                                                                                             | Condition                                                             | Standard / Criterion                                                                            |
| Low voltage power supplies, d.c. output Part 3: Electromagnetic compatibility                                                                          | JYTAB-R01-2100249                                                     | EN/IEC61204-3:2018                                                                              |
| ESD Electrostatic discharge immunity test                                                                                                              | Contact: $\pm 4\text{kV}$                                             | EN61000-4-2:2009, Criteria B                                                                    |
| Radiated, radio-frequency, electromagnetic field immunity test                                                                                         | 10V/m (80-1000MHz)<br>3V/m (1400-2000MHz)<br>1V/m (2000-2700MHz)      | EN61000-4-3:2006, Criteria A                                                                    |
| Fast Transient and Burst Immunity                                                                                                                      | AC Port: L-N 2kV                                                      | EN61000-4-4:2012, Criteria A                                                                    |
| Surge Immunity                                                                                                                                         | AC Port: L-N 0,5, 1kV                                                 | EN61000-4-5:2014, Criteria A                                                                    |
| Immunity to conducted disturbances, induced by radio-frequency fields                                                                                  | AC Port: 10Vrms (0.15-80MHz)                                          | EN61000-4-6:2014, Criteria A                                                                    |
| Power Magnetic Field Immunity                                                                                                                          | 30A/m                                                                 | EN61000-4-8:2010, Criteria A                                                                    |
| Voltage Dips and Interruptions                                                                                                                         | Dips: 100% (0.5, 1.0P), 30%, 20%<br>60%<br>Interruptions: 100%        | EN61000-4-11:2004, Criteria A<br>EN61000-4-11:2004, Criteria B<br>EN61000-4-11:2004, Criteria B |
| Limits of Voltage Fluctuations & Flicker                                                                                                               |                                                                       | EN61000-3-3:2013                                                                                |
| EMC Compliance (EN55032)                                                                                                                               | Condition                                                             | Standard / Criterion                                                                            |
| Electromagnetic compatibility of multimedia equipment - Emission requirements                                                                          | JYTAB-R01-2100250                                                     | EN55032:2015                                                                                    |
| Electromagnetic compatibility of multimedia equipment - Immunity requirements                                                                          |                                                                       | EN55035:2017                                                                                    |
| ESD Electrostatic discharge immunity test                                                                                                              | Contact: $\pm 2, 4\text{kV}$                                          | EN61000-4-2:2009, Criteria B                                                                    |
| Radiated, radio-frequency, electromagnetic field immunity test                                                                                         | 3 V/m (80-5000MHz)                                                    | EN61000-4-3:2006+A2:2010, Criteria A                                                            |
| Fast Transient and Burst Immunity                                                                                                                      | AC Port: L-N 1kV                                                      | EN61000-4-4:2012, Criteria A                                                                    |
| Surge Immunity                                                                                                                                         | AC Port: L-N 0,5, 1kV                                                 | EN61000-4-5:2014, Criteria A                                                                    |
| Immunity to conducted disturbances, induced by radio-frequency fields                                                                                  | AC Port: 3Vrms (0.15-10MHz)<br>3-1Vrms (10-30MHz)<br>1Vrms (30-80MHz) | EN61000-4-6:2014, Criteria A                                                                    |
| Power Magnetic Field Immunity                                                                                                                          | 1A/m                                                                  | EN61000-4-8:2010, Criteria A                                                                    |
| Voltage Dips and Interruptions                                                                                                                         | Dips: 100%, 30%<br>Interruptions: 100%                                | EN61000-4-11:2004, Criteria A<br>EN61000-4-11:2004, Criteria B                                  |
| Limits of Harmonic Current Emissions                                                                                                                   |                                                                       | EN61000-3-2:2014                                                                                |
| Limits of Voltage Fluctuations & Flicker                                                                                                               |                                                                       | EN61000-3-3:2013                                                                                |

**Specifications** (measured @ Ta= 25°C, nom. Vin, 130W @1m/s airflow and after warm-up unless otherwise stated)



### DIMENSION AND PHYSICAL CHARACTERISTICS

| Parameter         | Type                     | Value                 |
|-------------------|--------------------------|-----------------------|
| Material          | PCB                      | FR4, (UL94-V0)        |
|                   | baseplate / case ("/ENC) | aluminum              |
| Dimension (LxWxH) | "/OF" Version            | 101.6 x 50.8 x 32.0mm |
|                   | "/ENC" Version           | 118.3 x 62.7 x 38.7mm |
| Weight            | "/OF" Version            | 200g typ.             |
|                   | "/ENC" Version           | 260g typ.             |


Dimension Drawing "/OF"(mm)

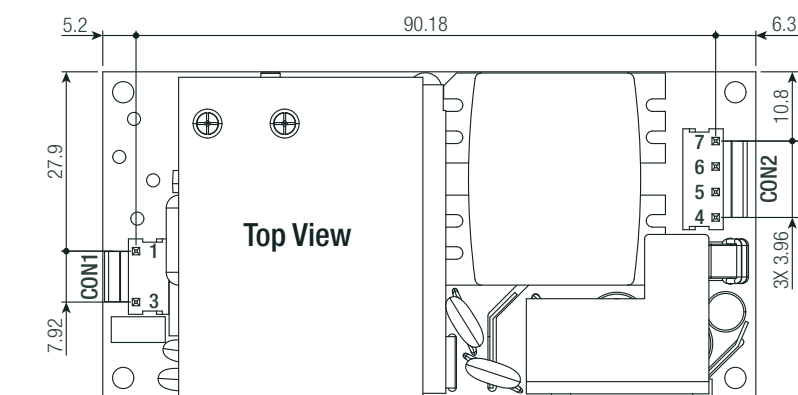


Side View

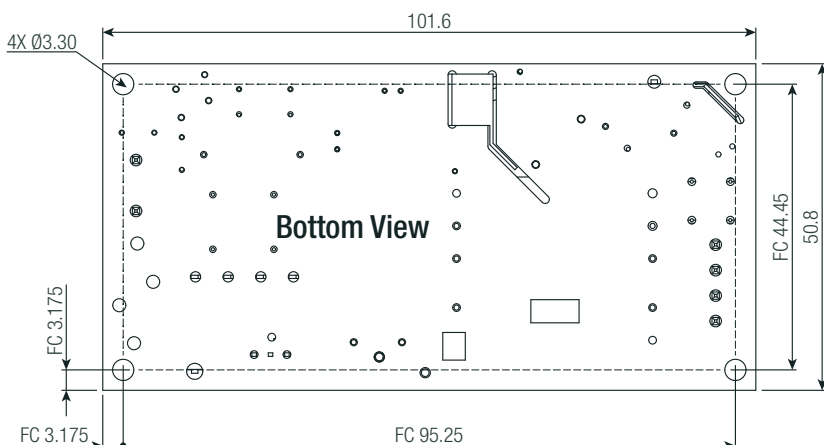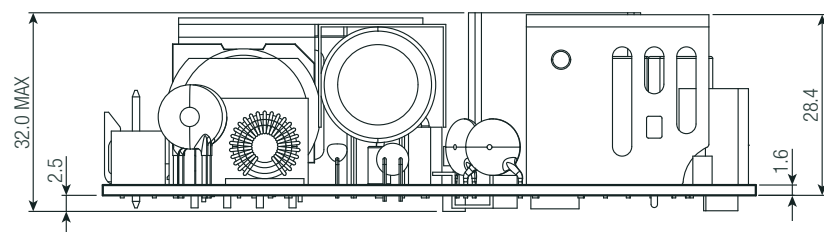

AC Input Side View



DC Output Side View



### Connector Information

| #                       | Function   | Terminal              |
|-------------------------|------------|-----------------------|
| <b>AC Input (CON1)</b>  |            |                       |
| 1                       | VAC in (N) | 3 Pins (Pin2 removed) |
| 3                       | VAC in (L) | with 3.96mm pitch     |
| <b>DC Output (CON2)</b> |            |                       |
| 4,5                     | +VDC out   | 4 Pins                |
| 6,7                     | -VDC out   | with 3.96mm pitch     |

FC= fixing centers

### Compatible Connector

#### Housing

Molex 41695 Series or equivalent

#### Crimp Terminal


Molex 2478 Series or equivalent

Tolerances: xx.x= ±0.5mm  
xx.xx= ±0.25mm


continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, 130W @1m/s airflow and after warm-up unless otherwise stated)


Dimension Drawing "/ENC"(mm)

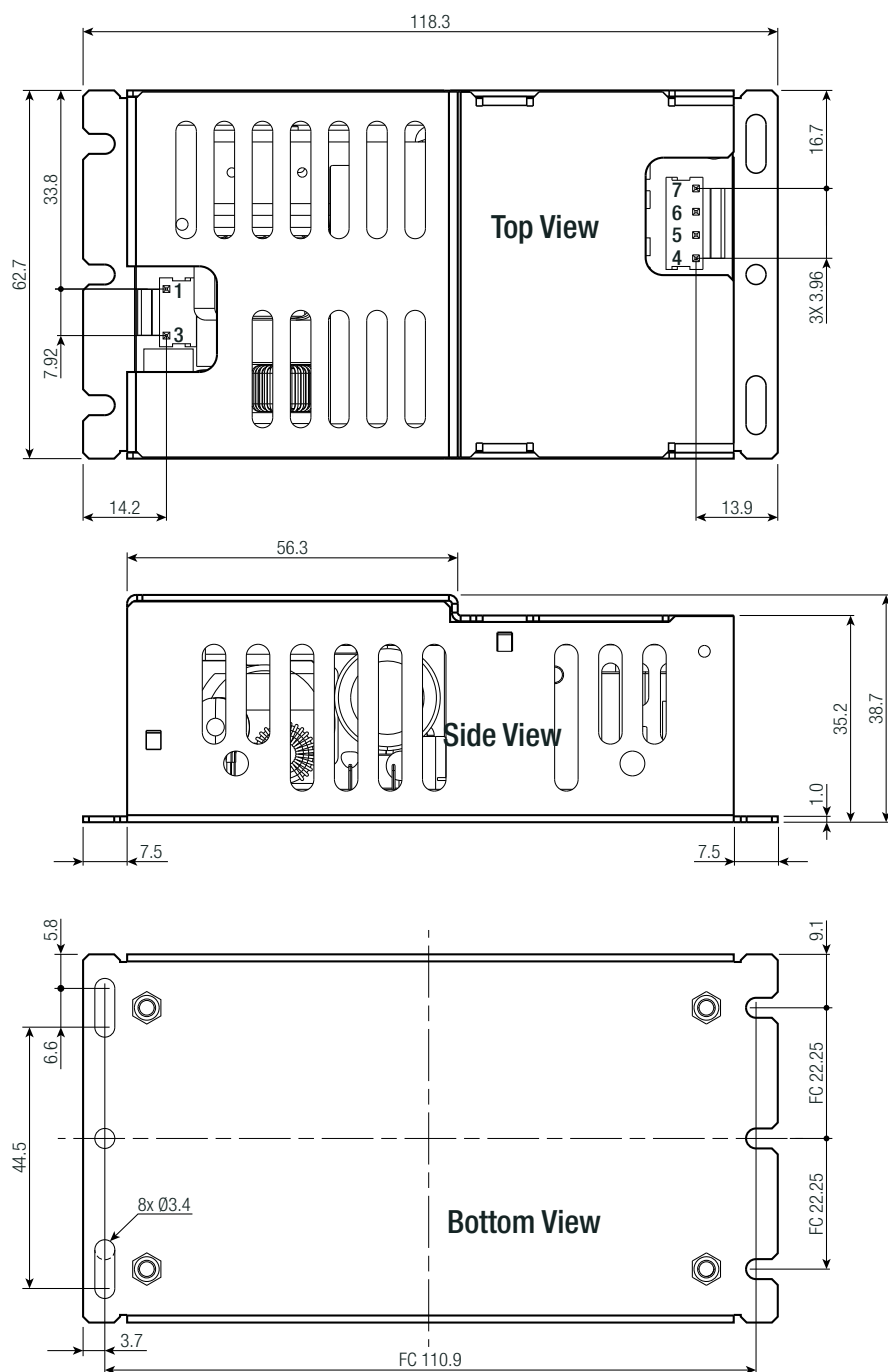

AC Input Side View

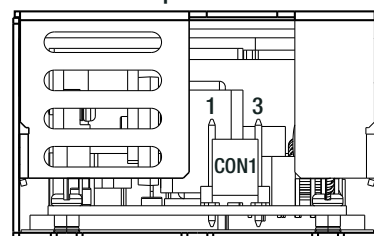

DC Output Side View

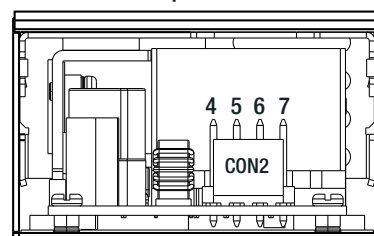

### Connector Information

| #                       | Function   | Terminal              |
|-------------------------|------------|-----------------------|
| <b>AC Input (CON1)</b>  |            |                       |
| 1                       | VAC in (N) | 3 Pins (Pin2 removed) |
| 3                       | VAC in (L) | with 3.96mm pitch     |
| <b>DC Output (CON2)</b> |            |                       |
| 4,5                     | +VDC out   | 4 Pins                |
| 6,7                     | -VDC out   | with 3.96mm pitch     |

FC= fixing centers

### Compatible Connector

#### Housing

Molex 41695 Series or equivalent

#### Crimp Terminal



Molex 2478 Series or equivalent

Tolerances: xx.x= ±0.5mm  
xx.xx= ±0.25mm


**Specifications** (measured @  $T_a = 25^\circ\text{C}$ , nom. Vin, 130W @ 1m/s airflow and after warm-up unless otherwise stated)

## APPLICATION AND INSTALLATION


### Mounting

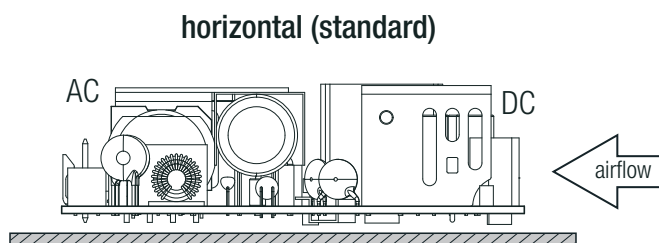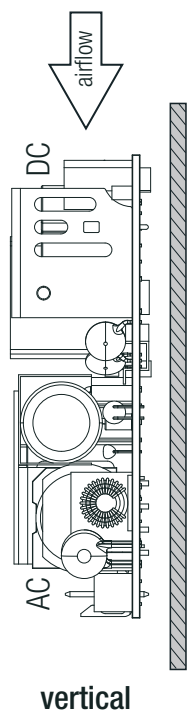

If module is mounted vertical or upside-down with natural convection cooling, the power must be derated  $\geq 10\%$ .

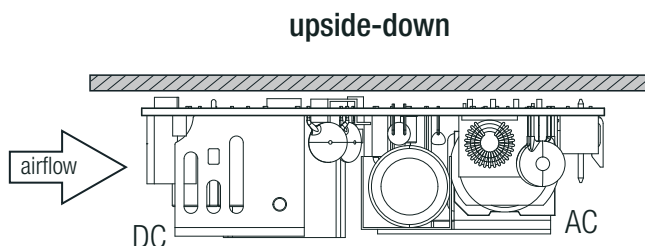

### Blockdiagram ("OF")

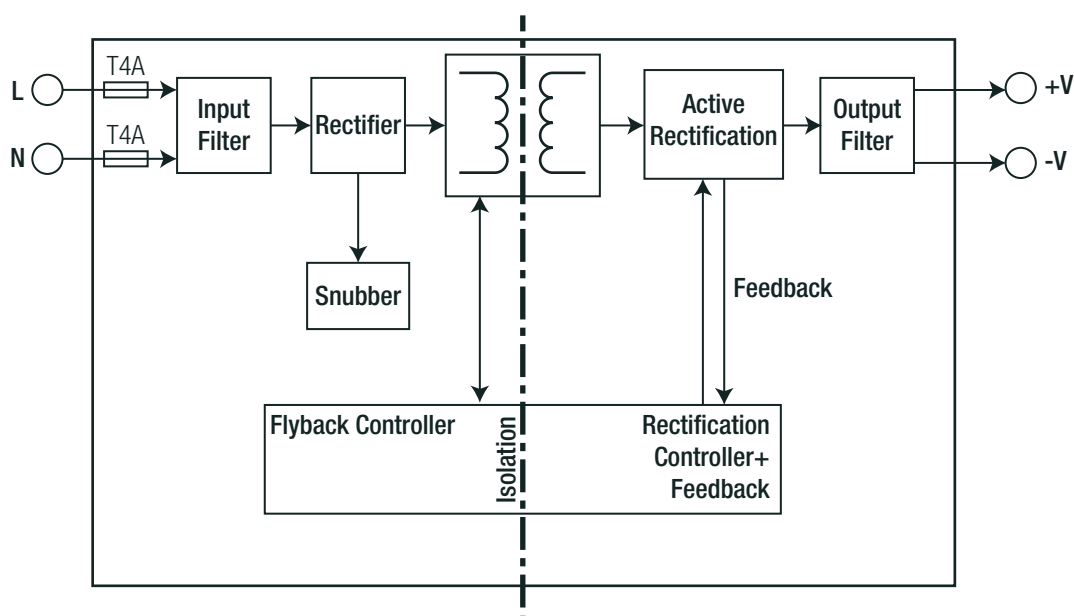


continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, 130W @1m/s airflow and after warm-up unless otherwise stated)

### APPLICATION AND INSTALLATION

Blockdiagram (“/ENC”)

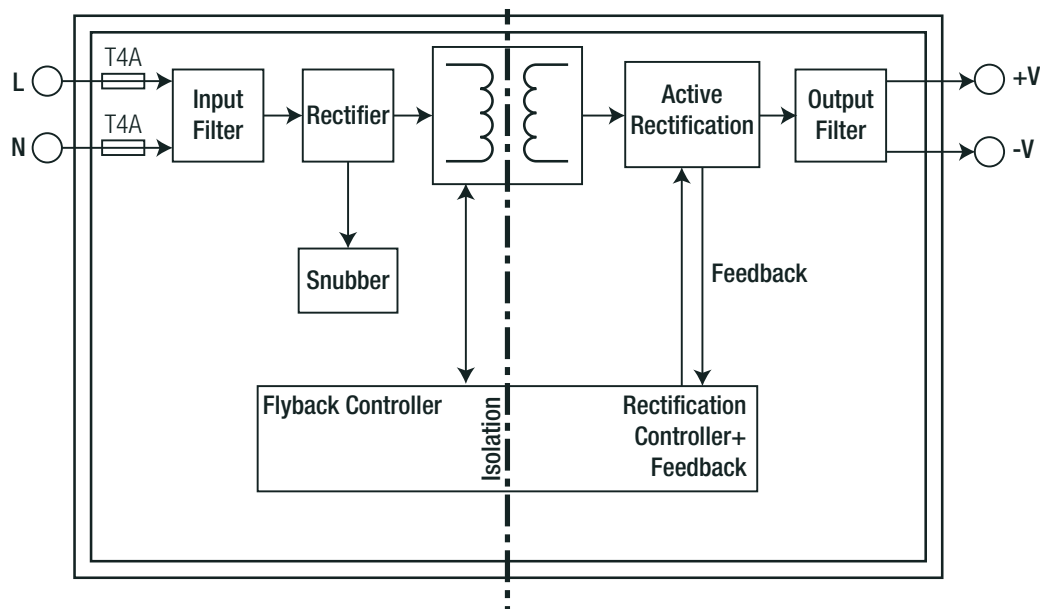

### PACKAGING INFORMATION

| Parameter                   | Type           |      | Value                  |
|-----------------------------|----------------|------|------------------------|
| Packaging Dimension (LxWxH) | “/OF” type     | tray | 365.0 x 210.0 x 56.0mm |
|                             | “/ENC” type    |      | 435.0 x 370.0 x 94.0mm |
| Packaging Quantity          | “/OF” type     |      | 9pcs                   |
|                             | “/ENC” type    |      | 18pcs                  |
| Storage Temperature Range   |                |      | -40°C to +90°C         |
| Storage Humidity            | non-condensing |      | 95% max.               |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.